


Woven Roving

- * No fuzz, dirt or impurities
- * Fast wet-out
- * Even thickness
- * Good covering and degassing properties
- * High mechanical strength and high wet strength retention
- * Woven Tapes - No Cutting Required
- * No Fray

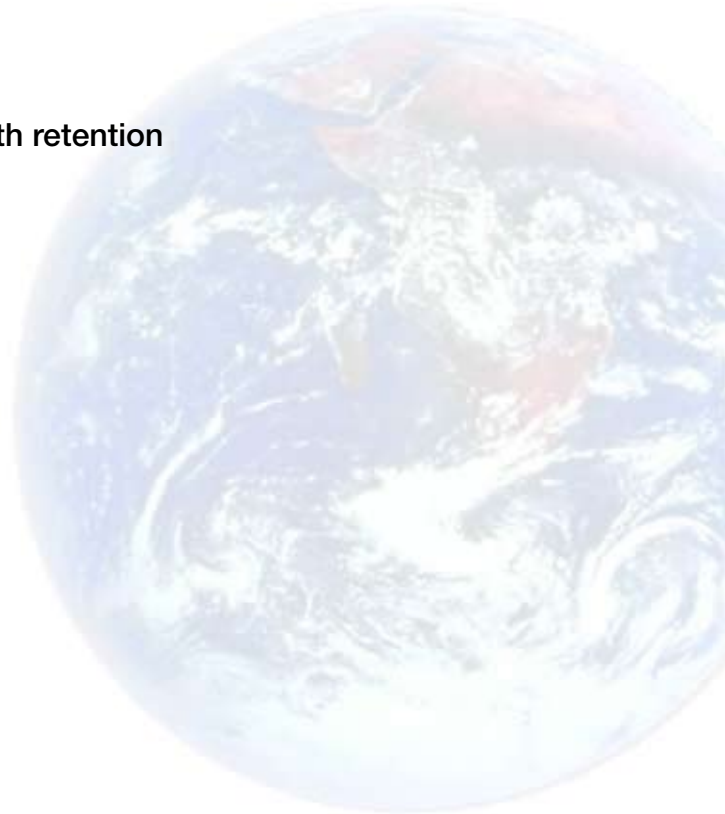

Woven Roving is not twisted and therefore wets out easily. It is used primarily for FRP composites produced for hand lay-up for local reinforcements or large moulding presses. It is often used in conjunction with chopped strand mat to add bulk and increase stiffness to boats, automobiles and storage tanks.

Resintex woven roving cloth and tapes are offered in a range of different weights including 300, 450, 600 and 800gm/ m2 weights. We also custom weave bi and uni directional narrow woven roving tapes up to 100mm wide to any weight specification. Please see our standard tapes below which are held in stock.

Product Code	Weave Pattern	Width	Weight gms/m2
WR300/100/50	Uni – Directional	100mm	300
WR450/100/50	Uni - Directional	100mm	450
WR600/100/50	Uni – Directional	100mm	600
WR1424/050/50	Uni – Directional	50mm	600
WR800/100/50	Uni – Directional	100mm	800
WR1410/070/50	Uni – Directional	70mm	1560

For further information, please contact us on 0161 368 2048 or email sales@cheshireribbon.co.uk.